

珠海銓高機電設備有限公司
RENOVO ZHUHAI LTD.

相信科技 相信雷諾威
Trust technology, Trust Renovo

分體式基站精密空調
SPLIT-TYPE BASE STATION
PRECISION AIR-CONDITIONING



Renovo
AIR

分體式基站精密空調 SPLIT-TYPE BASE STATION PRECISION AIR-CONDITIONING

Telemate系列基站空調是鉦高機電設備有限公司專為小型通訊機房、小型IT機房、移動通信基站研發設計的。它為高科技電信設備提供最大程度的可靠性、最高的運行效率、精密的溫度控制和良好的節能效果。

Telemate series base station air-conditioning products are designed and produced for the small communication rooms, the small IT rooms and the BTS by Renovo Zhuhai., Ltd. It provides maximum reliability, efficiency, precision and high energy-saving for the high-tech telecommunications equipment.

配置 CONFIGURATION

- ※智能微處理器 Microprocessor control system
- ※高效過濾器 High efficiency filter
- ※可調速冷凝風機 Modulating condenser fans speed control
- ※低噪音渦旋式壓縮機 Scroll compressor with low noise level

產品優點 PRODUCT ADVANTAGES

- ※機組體型修長，占地面積小
Tall design with small footprint
- ※安裝維護簡單，全正面維護
Convenient installation, maintenance and repairment
- ※智能穩定的控溫功能
Intelligent stable temperature control
- ※低能耗，低噪音，高顯熱比
Low energy consumption, low noise and high sensible cooling capacity
- ※24小時×365天穩定運行
Operating 24 hours × 365 days stability
- ※電力中斷恢復后，機組可自行啓動
Automatic restart after power restore
- ※多級密碼保護，防止誤操作
3-level password protection to prevent misuse
- ※可存儲報警
It can record alarm event and alarm time
- ※可選配通信端口，實現遠程監控
Optional: communication interface available for remote control



應用範圍

SCOPE OF APPLICATION

- ※通信基站、3G基站 BTS
- ※電話交換機房 Telephone exchanges
- ※控制室 Control rooms
- ※檢測室、實驗室 Examinations rooms, Laboratories
- ※計算機房 Computer rooms
- ※會議廳、會客室 Boardrooms, Reception room


可選附件

ACCESSORIES

- ※電加熱器 Electric heating
- ※電子膨脹閥 Electronic Expansion Valve
- ※新風過濾器 Fresh air filter
- ※高壓風機 High pressure fans
- ※送風帽 Air discharge plenum
- ※RS485串口適配器 RS485 serial port

分體式基站空調制冷示意圖

REFRIGERATION SCHEMATIC

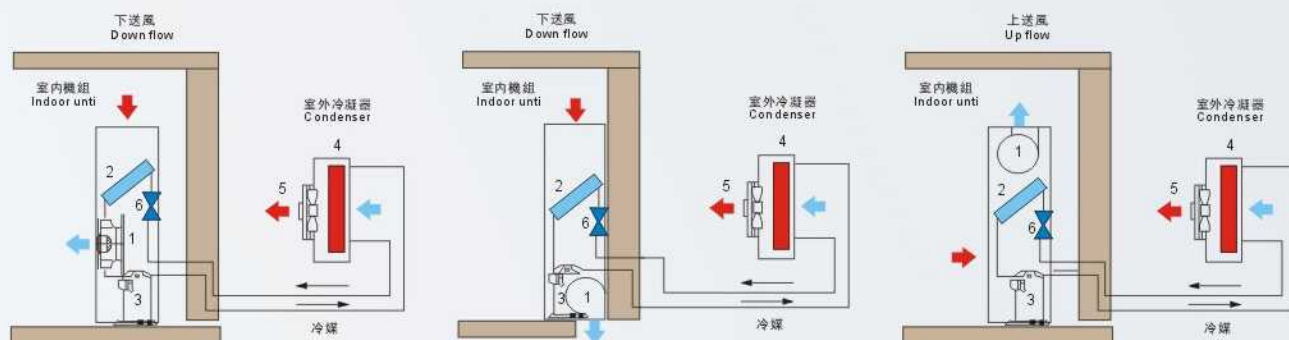

技術參數

TECHNICAL DATA

型號	Model	TDA-TUA	006A	008A	010A	013A	TUA018A	TDA018A	TUA020A	TDA020A	024A
制冷量（室內條件：24℃-50%RH）											
總冷量	Total Capacity	kW	6.40	8.30	10.10	13.10	17.40	16.90	20.10	19.90	24.10
顯冷量	Sensible Capacity	kW	6.10	7.90	9.60	12.40	16.50	16.10	19.10	18.90	23.00
輸入電源	SUPPLY VOLTAGE	V/Ph/Hz	230/1/50 or 400/3/50			400/3/50					
尺寸和重量 DIMENSION AND WEIGHT											
高度	Height	mm	1740	1740	1740	1740	1740	1740	1740	1740	1740
寬度	Width	mm	550	550	700	700	1200	1200	1200	1200	1200
深度	Depth	mm	450	450	450	450	450	450	450	450	450
淨重	Weight	kg	130	135	150	185	290	290	315	315	340
直聯式離心風機 CENTRIFUGAL FAN											
風機數量	Number of fans		1	1	1	1	3	2	3	2	3
額定風量	Air flow	m³/h	1800	1800	2450	2600	4860	4940	5200	5350	5700
功率(每個)	power (each)	kW	0.245	0.245	0.245	0.245	0.245	0.350	0.245	0.350	0.245
壓縮機 COMPRESSORS											
數量	Number		1	1	1	1	1	1	1	1	1
制冷回路	Number of circuits		1	1	1	1	1	1	1	1	1
G4空氣過濾器 G4 FILTERS											
數量	Number		1	1	1	1	1	1	1	1	1
尺寸(每個)	Dimensions (each)	mm	410X575	410X575	560X575	560X575	1060X575	1060X575	1060X575	1060X575	1060X575
厚度(每個)	Depth (each)	mm	48	48	48	48	48	48	48	48	48
電加熱器(可選) ELECTRIC HEAT											
級數	Number of stages		1	1	1	1	1	1	1	1	1
總功率	Total power	kW	2	2	2	3	6	6	6	6	6
機組噪音 UNITS NOISE											
噪音等級	Noise data	dB(A)	41.2	41.8	43.8	45.6	48.1	47.9	49.3	48.7	51.4
建議冷凝器 CONDENSER											
數量	Number	40℃	1	1	1	1	1	1	1	1	1
型號	Type		RCA011	RCA011	RCA013	RCA018	RCA022	RCA022	RCA025	RCA025	RCA033
數量	Number	45℃	1	1	1	1	1	1	1	1	1
型號	Type		RCA013	RCA013	RCA018	RCA018	RCA025	RCA025	RCA033	RCA033	RCA033

珠海銓高機電設備有限公司
珠海市香洲前山界涌工業區豐達路23號
電話: +86-756-8595968
傳真: +86-756-8595969
網址: www.renovair.com

Renovo Zhuhai Ltd.
A2 jiechong industry Area,Zhuhai PRC
Tel: +86-756-8595968
Fax: +86-756-8595969
<http://www.renovair.com>